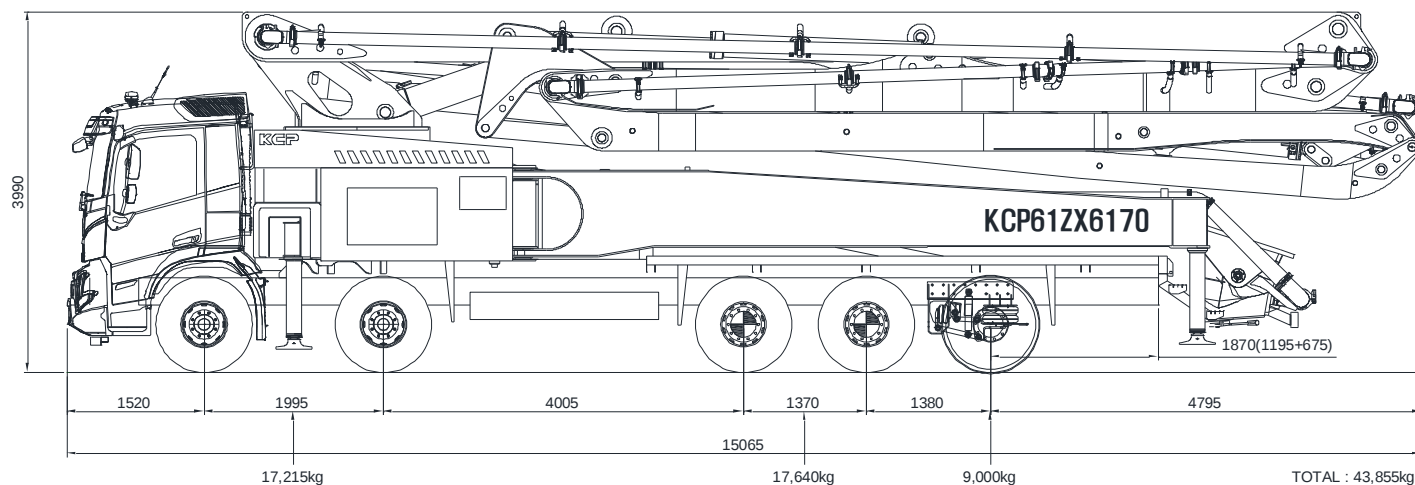


Our Pride ...


KCP61ZX6170

▣ Boom specifications

- ◎ Truck specifications : VOLVO FMX 10X4 (EURO6)
- ◎ Maximum theoretical values listed.
- ◎ Photos and drawings are for illustrative purpose only
- ◎ Right to make technical amendments reserved

▣ Working diagram

Vertical reach	60.3 M
Horizontal reach	55.1 M
Reach from front of truck	51.5 M
Unfolding height	13.6 M
Section articulation	92°/180°/210°/180°/210°/90°
Rotation	370°
Delivery line	125 mm
Proportional boom	Yes
End hose length	3.5 M
Outrigger spread-front	10.4 M
Outrigger spread-rear	13.2 M
Max. outrigger weight	42,500 kg

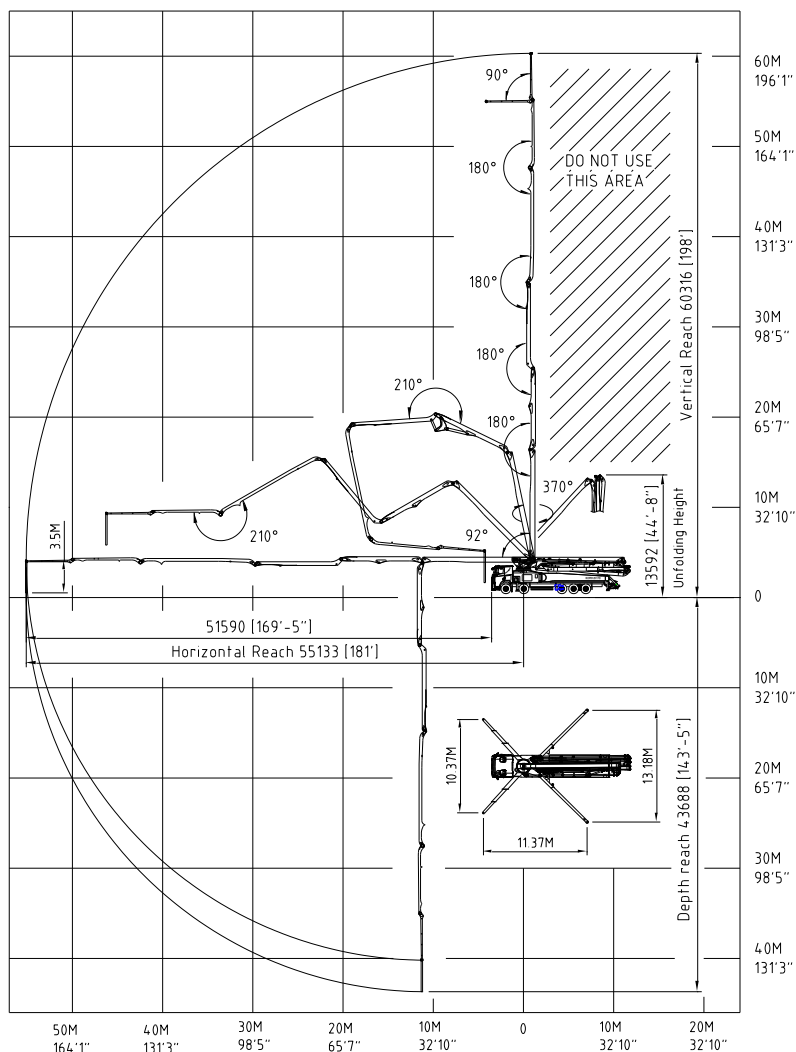

▣ Pump specifications

Maximum output	170 m³/h
Concrete cylinder	Ø230×2100
Stroke per minute	33
Concrete pressure	85 bar
Hopper capacity	0.6 m³
S-tube	Ø200×Ø180
Hydraulic pump	Rexroth A20VLO190
Cycling system	Hydraulic with manual overrides
Max. aggregate size	40 mm